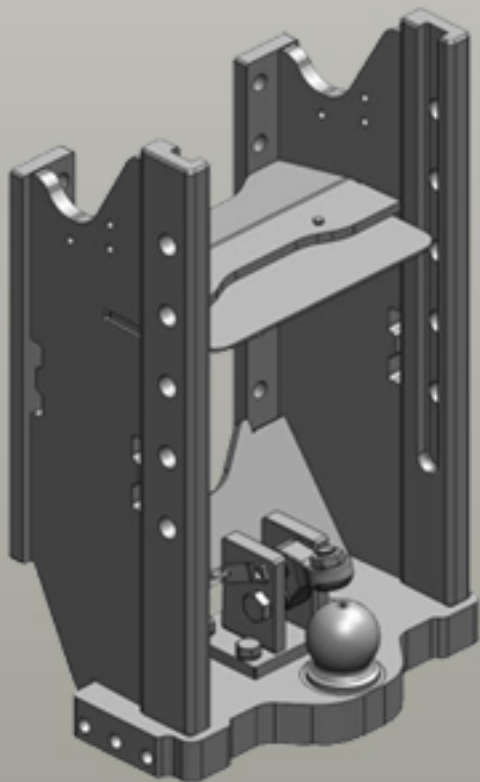
























Ladder Hitches New Holland



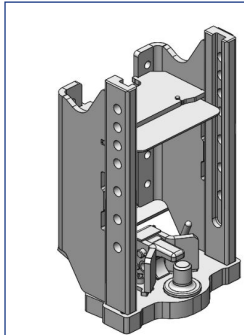
Ladder Hitches


	<p>Art.Nr. 00.110.03.1-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.110.03.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1140, 1145, 1150, 1155, 1170, 1175, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Deutz-Fahr: Agrottron 4.70-6.45 (MK1): 6.05, 6.15, 6.20, 6.30, 6.45; Agrottron 80-165 (MK2/MK3): 106, 110, 115, 120, 130, 135, 140, 150, 155, 165; Agrottron 80-180.7: 106, 108, 110, 115, 118, 120, 128, 130, 135, 150, 150.7, 165.7, 180.7; Agrottron M: 410, 420, 600, 610, 615, 620, 625, 640, 650; Agrottron TTV: 630; Doppstadt: Trac: 100, 130, 150, 160, 180, 200; Hürlimann: XL: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Lamborghini: RG: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Same: Iron: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195; Terrion: ATM 4000: 4140, 4160, 4180;</p>
	<p>Art.Nr. 00.110.05.0-A02 Ladder Hitches Standard Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.05.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1140, 1145, 1150, 1155, 1170, 1175, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Doppstadt: Trac: 100, 130, 150, 160, 180, 200; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>
	<p>Art.Nr. 00.110.75.1-A02 Ladder Hitches Standard Draw-Pin (Pitonfix) Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.110.75.1-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: Draw Pin (Pitonfix) Manual Max. Permissible D-Value (kN): 84,1 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1140, 1145, 1150, 1155, 1170, 1175, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Deutz-Fahr: Agrottron 4.70-6.45 (MK1): 6.05, 6.15, 6.20, 6.30, 6.45; Agrottron 80-165 (MK2/MK3): 106, 110, 115, 120, 130, 135, 140, 150, 155, 165; Agrottron 80-180.7: 106, 108, 110, 115, 118, 120, 128, 130, 135, 150, 150.7, 165.7, 180.7; Agrottron M: 410, 420, 600, 610, 615, 620, 625, 640, 650; Hürlimann: XL: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Lamborghini: RG: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Same: Iron: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195; Terrion: ATM 4000: 4140, 4160, 4180;</p>
	<p>Art.Nr. 00.110.84.2-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>• 4t Vertical Load possible with single Homologation</p> <p>Alternative color </p> <p>00.110.84.2-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 93,6 Max. Permissible Vertical Load (kg): 3500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>
	<p>Art.Nr. 00.110.84.4-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>• 4t Vertical Load possible with single Homologation</p> <p>Alternative color </p> <p>00.110.84.4-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 93,6 Max. Permissible Vertical Load (kg): 3500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1140, 1145, 1150, 1155, 1170, 1175, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Deutz-Fahr: Agrottron 4.70-6.45 (MK1): 6.05, 6.15, 6.20, 6.30, 6.45; Agrottron 80-165 (MK2/MK3): 106, 110, 115, 120, 130, 135, 140, 150, 155, 165; Agrottron 80-180.7: 106, 108, 110, 115, 118, 120, 128, 130, 135, 150, 150.7, 165.7, 180.7; Agrottron M: 410, 420, 600, 610, 615, 620, 625, 640, 650; Agrottron TTV: 630; Hürlimann: XL: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Lamborghini: RG: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Same: Iron: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195; Terrion: ATM 4000: 4140, 4160, 4180;</p>

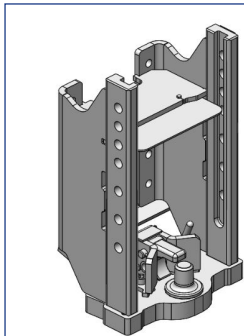
Ladder Hitches


	<p>Art.Nr. 00.110.88.0-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.88.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Automatic Max. Permissible D-Value (kN): 93,6 Max. Permissible Vertical Load (kg): 3500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 6140, 6150, 6160, 6175, 6195;</p>
	<p>Art.Nr. 00.111.00.0-A02 Ladder Hitches Standard Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.111.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 68,4 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line , Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXDrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5) New Holland: T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 SWB (Tier 4A), T7 SWB (Tier 4B) , TS-A Steyr: CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)</p>
	<p>Art.Nr. 00.111.80.0-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.111.80.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 64,2 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line , Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXDrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5) New Holland: T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 SWB (Tier 4A), T7 SWB (Tier 4B) , TS-A Steyr: CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)</p>
	<p>Art.Nr. 00.114.80.0-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.114.80.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 93,6 Max. Permissible Vertical Load (kg): 3500</p> <p>Adapted for Tractor</p> <p>Case IH: Magnum: 225, 250, 280, 310, 335; Magnum CVX (Tier 4f): 250, 280, 310, 340, 380; Magnum CVX EP : 235, 260, 290, 315, 340, 370; Magnum FPS (Tier 4f): 250, 280, 310, 340; Magnum FPS EP: 235, 260, 290, 315, 340; Magnum MX: 180, 200, 220, 240, 270; Magnum MX (II): 210, 230, 255, 285, 305; New Holland: T8 (Tier 4A): 8.275, 8.300, 8.330, 8.360, 8.390, 8.420; T8 (Tier 4B): 8.320, 8.350, 8.380, 8.410, 8.435; T8 Genesis (Tier 5): 8.350, 8.380, 8.410, 8.435; T8000: 8020, 8030, 8040, 8050; TG: 210, 215, 230, 245, 255, 275, 285, 305;</p>
	<p>Art.Nr. 00.114.890.0-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (390/25/32)</p> <p>Alternative color </p> <p>00.114.890.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 102,4 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Magnum: 225, 250, 280, 310, 335; Magnum CVX (Tier 4f): 250, 280, 310, 340, 380; Magnum CVX EP : 235, 260, 290, 315, 340, 370; Magnum CVX/PowerDrive (Stage 5): 310, 340, 380, 400; Magnum CVXDrive Rowtrac (Stage 5): 380; Magnum FPS (Tier 4f): 250, 280, 310, 340; Magnum FPS EP: 235, 260, 290, 315, 340; Magnum MX: 180, 200, 220, 240, 270; Magnum MX (II): 210, 230, 255, 285, 305; Magnum Rowtrac (Stage 5): 400; New Holland: T8 (Tier 4A): 8.275, 8.300, 8.330, 8.360, 8.390, 8.420; T8 (Tier 4B): 8.320, 8.350, 8.380, 8.410, 8.435; T8 Genesis (Tier 5): 8.350, 8.380, 8.410, 8.435; T8000: 8020, 8030, 8040, 8050;</p>

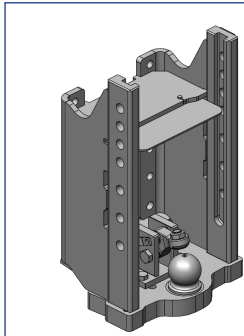
Ladder Hitches




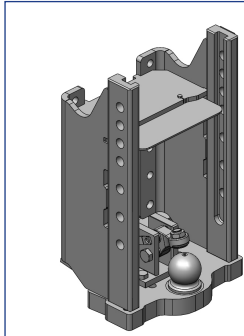
Art.Nr. 00.116.70.1-A02 Ladder Hitches Standard	
Draw-Pin (Pitonfix) Assembly Dimension Scharmüller S32 (330/25/32)	
Alternative color 	
00.116.70.1-A02 (Black)	
Technical Values*	
Locking: Draw Pin (Pitonfix) Automatic Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 3000	
Adapted for Tractor	
Case IH:	Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210;
New Holland:	T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B): 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175, 195;
Steyr:	CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;




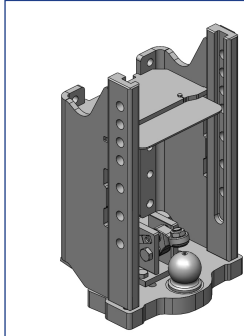
Art.Nr. 00.116.71.2-A02 Ladder Hitches Standard	
Draw-Pin (Pitonfix) Assembly Dimension Scharmüller S32 (330/25/32)	
Alternative color 	
00.116.71.2-A02 (Black)	
Technical Values*	
Locking: Draw Pin (Pitonfix) Automatic Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 3000	
Adapted for Tractor	
Case IH:	Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line , Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXdrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5)
New Holland:	T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 LWB (Tier 5), T7 SWB (Tier 4A), T7 SWB (Tier 4B) , T7 SWB (Tier 5), TS-A
Steyr:	CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Impuls CVT SWB (Tier 5), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)




Art.Nr. 00.116.80.1-A02 Ladder Hitches Standard	
K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)	
Alternative color 	
00.116.80.1-A02 (Black)	
Technical Values*	
Locking: K80® Manual Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 4000	
Adapted for Tractor	
Case IH:	Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210;
New Holland:	T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B): 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175, 195;
Steyr:	CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;













Art.Nr. 00.116.81.2-A02 Ladder Hitches Standard	
K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)	
Alternative color 	
00.116.81.2-A02 (Black)	
Technical Values*	
Locking: K80® Manual Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 4000	
Adapted for Tractor	
Case IH:	Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line , Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXdrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5)
New Holland:	T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 LWB (Tier 5), T7 SWB (Tier 4A), T7 SWB (Tier 4B) , T7 SWB (Tier 5), TS-A
Steyr:	CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Impuls CVT SWB (Tier 5), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)








Art.Nr. 00.116.88.1-A02 Ladder Hitches Standard	
K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)	
Alternative color 	
00.116.88.1-A02 (Black)	
Technical Values*	
Locking: K80® Automatic Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 4000	
Adapted for Tractor	
Case IH:	Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210;
New Holland:	T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B): 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175;
Steyr:	CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;











Ladder Hitches

	<p>Art.Nr. 00.116.890.1-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (390/25/32)</p> <p>Alternative color </p> <p>00.116.890.1-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 102,4 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Optum CVX (Tier 4B): 250, 270, 300; Optum CVXDrive (Tier 5): 250, 270, 300; Puma CVXDrive LWB (Tier 5): 185, 200, 220, 240; Puma Multicontroller LWB (Tier 5): 185, 200, 220; New Holland: T7 Heavy Duty (Tier 4B): 7.275, 7.290, 7.315; T7 Heavy Duty (Tier 5): 7.275, 7.290, 7.315; T7 LWB (Tier 5): 7.195 S, 7.215 S, 7.230, 7.245, 7.260, 7.270; Steyr: Absolut CVT LWB (Tier 5): 6185, 6200, 6220, 6240; Terrus CVT (Tier 4B): 6250, 6270, 6300; Terrus CVT (Tier 5): 6250, 6270, 6300;</p>
	<p>Art.Nr. 00.158.85.1-A02 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.158.85.1-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 91,3 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Fiat: G: 170, 190, 210, 240; Ford: 8070: 8670, 8770, 8870, 8970; New Holland: 8070: 8670, 8770, 8870, 8970; G : 170 , 190 , 210 , 240 ;</p>
	<p>Art.Nr. 00.270.00.1-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (255/25/32)</p> <p>Alternative color </p> <p>00.270.00.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 23,3 Max. Permissible Vertical Load (kg): 800</p> <p>Adapted for Tractor</p> <p>LS: R: 28, 36, 41, 50, 60; New Holland: Boomer: 30, 35, 40, 50; Boomer (Stage 5): 35, 40, 45, 50, 55;</p>
	<p>Art.Nr. 00.270.04.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.270.04.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 21 Max. Permissible Vertical Load (kg): 900</p> <p>Adapted for Tractor</p> <p>New Holland: Boomer: 46D, 54D;</p>
	<p>Art.Nr. 00.274.00.0-A02 Ladder Hitches Standard Assembly Dimension KN Scharmüller (160/16/25)</p> <p>Alternative color </p> <p>00.274.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 23,9 Max. Permissible Vertical Load (kg): 500</p> <p>Adapted for Tractor</p> <p>LS: J: 23, 27; New Holland: Boomer: 20, 25;</p>











Ladder Hitches

	<p>Art.Nr. 00.279.00.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.279.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 82,4 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Ford: 8030: 8630, 8730, 8830; New Holland: 8030: 8630, 8730, 8830;</p>
	<p>Art.Nr. 00.284.01.2-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.284.01.2-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 52 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall C EP (Tier 4): 105, 115, 85, 95; New Holland: T4 (Tier 4) : 4.105, 4.115, 4.75, 4.85, 4.95; T4 Dual Command: 4.105, 4.85, 4.95; T4 Low Profile: 4.105, 4.75, 4.85, 4.95; Steyr: Kompakt (Stufe V): 4080, 4090, 4100, 4110, 4120; Kompakt EcoTech (Tier 4): 4075, 4085, 4095, 4105, 4115;</p>
	<p>Art.Nr. 00.284.06.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (255/25/32)</p> <p>Alternative color </p> <p>00.284.06.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 42 Max. Permissible Vertical Load (kg): 1200</p> <p>Adapted for Tractor</p> <p>Case IH: JX V/N: 1060, 1070, 1075, 1085, 1095; Quantum V/N/F: 105, 65, 75, 85, 95; Quantum V/N/F/CL: 100, 110, 80, 90; New Holland: T4000V/N/F: 4020, 4030, 4040, 4050, 4060; T4V/N/F: 4.105, 4.65, 4.75, 4.85, 4.95; T4V/N/F (Tier 4A): 4.100, 4.110, 4.80, 4.90; TD4F: 4.70, 4.80, 4.90; TD4F (Tier4A): 4.100, 4.80, 4.90;</p>
	<p>Art.Nr. 00.286.03.3-A03 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.286.03.3-A03 (CNH-Darkgrey)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 60 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall A: 105, 115, 65, 75, 85, 95; Farmall C EP (Tier 3B): 105, 85, 95; Farmall U EP: 105, 115, 95; JX: 60, 70, 80, 90, 95; JXU: 100, 105, 115, 70, 75, 80, 85, 90, 95; Fiat: JXU Maximas: 1070, 1080, 1090, 1100; New Holland: 66 DT: 55-66, 60-66, 65-66, 70-66; 88 DT: 65-88, 70-88, 80-88; 90 DT: 55-90, 60-90, 65-90, 70-90, 80-90, 85-90; 94 DT: 60-94, 65-94, 72-94, 82-94, 88-94; T4 (Tier 3) : 4.105, 4.75, 4.85, 4.95; T5 (Tier 4A): 5.105, 5.115, 5.75, 5.85, 5.95; T5 Dual Command: 5.105, 5.115, 5.95; T5 Electro Command: 5.105, 5.115, 5.95; T5 Electro Command (Tier 4B): 5.100, 5.110, 5.120; T5 Range Command: 5.105, 5.115, 5.95; T5000: 5030, 5040, 5050, 5060, 5070; TD-D: 60, 70, 75, 80, 85, 90, 95; TD4000F: 4020, 4030, 4040; TD5: 5.105, 5.115, 5.65, 5.75, 5.85, 5.95; TD5000: 5010, 5020, 5030, 5040, 5050; TL: 100, 70, 80, 90; TL-A: 100, 70, 80, 90; Steyr: Kompakt EcoTech (Tier 3): 4085, 4095, 4105;</p>
	<p>Art.Nr. 00.286.070.0-A03 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.286.070.0-A03 (CNH-Darkgrey)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 70,2 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Case IH: Vestrum CVXDrive: 100, 110, 120, 130; New Holland: T5 Auto Command: 5.110, 5.120, 5.130, 5.140; T5 Dynamic Command: 5.110, 5.120, 5.130, 5.140; Steyr: Expert CVT: 4100, 4110, 4120, 4130;</p>











Ladder Hitches

	<p>Art.Nr. 00.286.80.2-A03 Ladder Hitches Standard K80® Ball Coupling System Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.286.80.2-A03 (CNH-Darkgrey)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 60 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall A: 105, 115, 65, 75, 85, 95; Farmall C EP (Tier 3B): 105, 85, 95; Farmall U EP: 105, 115, 95; JX: 60, 70, 80, 90, 95; JXC Maxxima: 1060, 1070, 1075, 1085, 1095; JXU: 100, 105, 115, 70, 75, 80, 85, 90, 95; JXU Maxxima: 1070, 1080, 1090, 1100; Fiat: 66 DT: 95-66, 60-66, 65-66, 70-66; 88 DT: 65-88, 70-88, 80-88; 90 DT: 55-90, 60-90, 65-90, 70-90, 80-90, 85-90; 94 DT: 60-94, 65-94, 72-94, 82-94, 88-94; New Holland: T4 (Tier 3): 4.105, 4.75, 4.85, 4.95; T5 (Tier 4A): 5.105, 5.115, 5.75, 5.85, 5.95; T5 Dual Command: 5.105, 5.115, 5.95; T5 Electro Command: 5.105, 5.115, 5.95; TD4000F: 4020, 4030, 4040; TD5: 5.105, 5.115, 5.65, 5.75, 5.85, 5.95; TD5000: 5010, 5020, 5030, 5040, 5050; TL: 100, 70, 80, 90; TL-A: 100, 70, 80, 90; Steyr: Kompakt EcoTech (Tier 3): 4085, 4095, 4105;</p>
	<p>Art.Nr. 00.287.00.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.287.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 59,8 Max. Permissible Vertical Load (kg): 1800</p> <p>Adapted for Tractor</p> <p>New Holland: TS: 100, 110, 115, 90;</p>
	<p>Art.Nr. 00.288.30.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (200/25/32)</p> <p>Alternative color </p> <p>00.288.30.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 24,9 Max. Permissible Vertical Load (kg): 650</p> <p>Adapted for Tractor</p> <p>Landini: Mistral: 40, 45, 50, 55; McCormick: GM: 40, 45, 50, 55; GX: 45, 50; GX-H: 45, 50; New Holland: T3000: 3010, 3020, 3030, 3040; TCE: 40, 45, 50, 55; Valpadana: 1500: 1540, 1545, 1550, 1555;</p>
	<p>Art.Nr. 00.295.12.0-A02 Ladder Hitches Standard Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>• Art.Nr. 05.6330.10 and Art.Nr. 05.6330.51 not useable</p> <p>Alternative color </p> <p>00.295.12.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 54,5 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmlift: 525, 632, 635, 735, 742, 935; New Holland: LM Teleskoplader: 5.25, 5040, 5060, 5080, 6.28, 6.32, 6.35, 7.35, 7.42, 9.35;</p>
	<p>Art.Nr. 00.110.15.0-A02 Ladder Hitches Short Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.15.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Doppstadt: Trac: 100, 130, 150, 160, 180, 200; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>











Ladder Hitches

	<p>Art.Nr. 00.110.15.2-A02 Ladder Hitches Short Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.110.15.2-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1140, 1145, 1150, 1155, 1170, 1175, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Agrotion 4.70-6.45 (MK1): 6.05, 6.15, 6.20, 6.30, 6.45; Agrotion 80-165 (MK2/MK3): 106, 110, 115, 120, 130, 135, 140, 150, 155, 165; Agrotion 80-180.7: 106, 108, 110, 115, 118, 120, 128, 130, 135, 150, 150.7, 165.7, 180.7; Agrotion M: 410, 420, 600, 610, 615, 620, 625, 640, 650; Agrotion TTV: 630; Trac: 100, 130, 150, 160, 180, 200; Hurlimann: XL: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; R6: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Lamborghini: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Same: Iron: 130, 140, 150, 150.7, 160, 165.7, 175, 180.7, 185; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195; Terrion: ATM 4000: 4140, 4160, 4180;</p>
	<p>Art.Nr. 00.111.11.0-A02 Ladder Hitches Short Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.111.11.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 68,4 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line, Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXDrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5) New Holland: T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 LWB (Tier 5), T7 SWB (Tier 4A), T7 SWB (Tier 4B), T7 SWB (Tier 5), TS-A Steyr: CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Impuls CVT SWB (Tier 5), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)</p>
	<p>Art.Nr. 00.285.10.0-A02 Ladder Hitches Short Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.285.10.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 68,4 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210; T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B): 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; New Holland: T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175, 195; Steyr: CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;</p>
	<p>Art.Nr. 00.286.15.1-A03 Ladder Hitches Short Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.286.15.1-A03 (CNH-Darkgrey)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 60 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall A: 105, 115, 65, 75, 85, 95; Farmall C EP (Tier 3B): 105, 85, 95; Farmall U EP: 105, 115, 95; JX: 60, 70, 80, 90, 95; JXU: 100, 105, 115, 70, 75, 80, 85, 90, 95; JXU Maximas: 1070, 1080, 1090, 1100; Fiat: 66 DT: 55-66, 60-66, 65-66, 70-66; 88 DT: 65-88, 70-88, 80-88; 90 DT: 55-90, 60-90, 65-90, 70-90, 80-90, 85-90; 94 DT: 60-94, 65-94, 72-94, 82-94, 88-94; New Holland: T4 (Tier 3): 4.105, 4.75, 4.85, 4.95; T5 (Tier 4A): 5.105, 5.115, 5.115, 5.75, 5.85, 5.95; T5 Dual Command: 5.105, 5.115, 5.95; T5 Electro Command: 5.105, 5.115, 5.95; TS Electro Command (Tier 4B): 5.100, 5.110, 5.120; T5 Range Command: 5.105, 5.115, 5.95; T5000: 5030, 5040, 5050, 5060, 5070; TD-D: 60, 70, 75, 80, 85, 90, 95; TD4000F: 4020, 4030, 4040; TD5: 5.105, 5.115, 5.65, 5.75, 5.85, 5.95; TD5000: 5010, 5020, 5030, 5040, 5050; TL: 100, 70, 80, 90; TL-A: 100, 70, 80, 90; Steyr: Kompakt EcoTech (Tier 3): 4085, 4095, 4105;</p>
	<p>Art.Nr. 00.110.05.2-A02 Ladder Hitches Long Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.05.2-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>









Ladder Hitches

	<p>Art.Nr. 00.110.87.0-A02 Ladder Hitches Long K80® Ball Coupling System Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.87.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: K80® Manual Max. Permissible D-Value (kN): 93,6 Max. Permissible Vertical Load (kg): 3500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>
	<p>Art.Nr. 00.106.01.0-A03 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.106.01.0-A03 (CNH-Darkgrey)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 31,4 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall A: 55; New Holland: TD3: 3.50;</p>
	<p>Art.Nr. 00.110.55.0-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.55.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Doppstadt: Trac: 100, 130, 150, 160, 180, 200; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>
	<p>Art.Nr. 00.110.75.0-A02 Ladder Hitches Prepared for Drawbar Draw-Pin (Pitonfix) Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.110.75.0-A02 (Black)</p> <p>Technical Values*</p> <p>Locking: Draw Pin (Pitonfix) Manual Max. Permissible D-Value (kN): 84,1 Max. Permissible Vertical Load (kg): 3000</p> <p>Adapted for Tractor</p> <p>Case IH: CS: 110, 120, 130, 150; CVX: 1135, 1145, 1155, 1170, 1190, 1195, 120, 130, 140, 150, 160, 170, 175, 190, 195; Doppstadt: Trac: 100, 130, 150, 160, 180, 200; New Holland: T7500: 7510, 7520, 7530, 7540, 7550; TVT: 135, 145, 155, 170, 190, 195; Steyr: 9100: 9105, 9115, 9125, 9145; CVT: 120, 130, 150, 170, 195, 6140, 6145, 6150, 6155, 6160, 6170, 6175, 6190, 6195;</p>
	<p>Art.Nr. 00.114.390.0-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (390/25/32)</p> <p>Alternative color </p> <p>00.114.390.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 97,1 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Magnum: 225, 250, 280, 310, 335; Magnum CVX (Tier 4f): 250, 280, 310, 340, 380; Magnum CVX EP : 235, 260, 290, 315, 340, 370; Magnum CVX/PowerDrive (Stage 5): 310, 340, 380, 400; Magnum CVXDrive Rowtrac (Stage 5): 380; Magnum FPS (Tier 4f): 250, 280, 310, 340; Magnum FPS EP: 235, 260, 290, 315, 340; Magnum MX: 180, 200, 220, 240, 270; Magnum MX (II): 210, 230, 255, 285, 305; Magnum Rowtrac (Stage 5): 400; New Holland: T8 (Tier 4A): 8.275, 8.300, 8.330, 8.360, 8.390, 8.420; T8 (Tier 4B): 8.320, 8.350, 8.380, 8.410, 8.435; T8 Genesis (Tier 5): 8.350, 8.380, 8.410, 8.435; T8000: 8020, 8030, 8040, 8050;</p>

Ladder Hitches

	<p>Art.Nr. 00.114.50.1-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.114.50.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 91,3 Max. Permissible Vertical Load (kg): 2000</p> <p>Adapted for Tractor</p> <p>Case IH: Magnum: 225, 250, 280, 310, 335; Magnum CVX (Tier 4f): 250, 280, 310, 340, 380; Magnum CVX EP : 235, 260, 290, 315, 340, 370; Magnum FPS (Tier 4f): 250, 280, 310, 340; Magnum FPS EP: 235, 260, 290, 315, 340; Magnum MX: 180, 200, 220, 240, 270; Magnum MX (II): 210, 230, 255, 285, 305; New Holland: T8 (Tier 4A): 8.275, 8.300, 8.330, 8.360, 8.390, 8.420; T8 (Tier 4B): 8.320, 8.350, 8.380, 8.410, 8.435; T8 Genesis (Tier 5): 8.350, 8.380, 8.410, 8.435; T8000: 8020, 8030, 8040, 8050; TG: 210, 215, 230, 245, 255, 275, 285, 305;</p>
	<p>Art.Nr. 00.116.05.1-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.116.05.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210; T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B) : 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175, 195; New Holland: Steyr: CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;</p>
	<p>Art.Nr. 00.116.05.3-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.116.05.3-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 102,4 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Optum CVX (Tier 4B): 250, 270, 300; Optum CVXDrive (Tier 5): 250, 270, 300; New Holland: T7 Heavy Duty (Tier 4B): 7.275, 7.290, 7.315; T7 Heavy Duty (Tier 5): 7.275, 7.290, 7.315; Steyr: Terrus CVT (Tier 4B): 6250, 6270, 6300; Terrus CVT (Tier 5): 6250, 6270, 6300;</p>
	<p>Art.Nr. 00.116.07.0-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension JSV-Scharmüller (325/25/26)</p> <p>Alternative color </p> <p>00.116.07.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum MXM: 120, 130, 140, 155, 175, 190; Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210; T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B) : 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; TM: 115, 120, 125, 130, 135, 140, 150, 155, 165, 170, 175, 195; New Holland: Steyr: CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;</p>
	<p>Art.Nr. 00.116.08.1-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.116.08.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Maxxum (Tier 4B), Maxxum CVX (Tier 4B), Maxxum CVX-EP, Maxxum EP, Maxxum Multicontroller, Maxxum Multicontroller (Tier 4B), Maxxum MXU, Maxxum X-Line , Puma CVX EP SWB (Tier 4A), Puma CVX EP SWB (Tier 4B), Puma CVXDrive SWB (Tier 5), Puma EP SWB (Tier 4A), Puma EP SWB (Tier 4B), Puma Multicontroller SWB (Tier 5), Puma SWB, Puma X (Tier 5) New Holland: T6, T6 (Tier 4B), T6000 Delta, T6000 Elite, T6000 Plus, T6000 Range & Power Command, T7 LWB (Tier 5), T7 SWB (Tier 4A), T7 SWB (Tier 4B) , T7 SWB (Tier 5), TS-A Steyr: CVT EcoTech SWB (Tier 4A), CVT EcoTech SWB (Tier 4B), Impuls CVT SWB (Tier 5), Profi, Profi Classic EcoTech, Profi Classic EcoTech (Tier 4), Profi CVT EcoTech, Profi CVT EcoTech (Tier 4), Profi EcoTech, Profi EcoTech (Tier 4)</p>

Ladder Hitches

	<p>Art.Nr. 00.116.390.0-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (390/25/32)</p> <p>Alternative color </p> <p>00.116.390.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 102,4 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Puma CVX EP LWB (Tier 4A): 170, 185, 200, 215, 230; Puma CVX EP LWB (Tier 4B): 185, 200, 220, 240; Puma CVX LWB: 165, 180, 195, 210, 225; Puma EP LWB (Tier 4A): 170, 185, 200, 215; Puma EP LWB (Tier 4B): 185, 200, 220; Puma LWB: 165, 180, 195, 210; New Holland: T7 LWB (Tier 4A): 7.220, 7.235, 7.250, 7.260, 7.270; T7 LWB (Tier 4B): 7.195S, 7.215S, 7.230, 7.245, 7.260, 7.270; T7000 Auto Command: 7030, 7040, 7050, 7060, 7070, 7080; T7000 Power Command: 7030, 7040, 7050, 7060; Steyr: CVT (Tier 3): 6165, 6180, 6200, 6210, 6225; CVT EcoTech LWB (Tier 4A): 6170, 6185, 6205, 6215, 6230; CVT EcoTech LWB (Tier 4B): 6185, 6200, 6220, 6240;</p>
	<p>Art.Nr. 00.116.392.0-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (390/25/32)</p> <p>Alternative color </p> <p>00.116.392.0-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 102,4 Max. Permissible Vertical Load (kg): 4000</p> <p>Adapted for Tractor</p> <p>Case IH: Optum CVX (Tier 4B): 250, 270, 300; Optum CVXDrive (Tier 5): 250, 270, 300; Puma CVXDrive LWB (Tier 5): 185, 200, 220, 240; Puma Multicontroller LWB (Tier 5): 185, 200, 220; New Holland: T7 Heavy Duty (Tier 4B): 7.275, 7.290, 7.315; T7 Heavy Duty (Tier 5): 7.275, 7.290, 7.315; T7 LWB (Tier 5): 7.195 S, 7.215 S, 7.230, 7.245, 7.260, 7.270; Steyr: Absolut CVT LWB (Tier 5): 6185, 6200, 6220, 6240; Terrus CVT (Tier 4B): 6250, 6270, 6300; Terrus CVT (Tier 5): 6250, 6270, 6300;</p>
	<p>Art.Nr. 00.283.32.1-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.283.32.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 52 Max. Permissible Vertical Load (kg): 1500</p> <p>Adapted for Tractor</p> <p>Case IH: Farmall A (TMR ab 10/2017): 55, 65, 75; Farmall C EP (Tier 3B): 55, 65, 75; New Holland: T4 Powerstar: 4.55, 4.65, 4.75; T4S (Tier 4A): 4.55, 4.65, 4.75; Steyr: Kompakt S: 4055, 4065;</p>
	<p>Art.Nr. 00.283.50.1-A02 Ladder Hitches Prepared for Drawbar Assembly Dimension Scharmüller S32 (330/25/32)</p> <p>Alternative color </p> <p>00.283.50.1-A02 (Black)</p> <p>Technical Values*</p> <p>Max. Permissible D-Value (kN): 52 Max. Permissible Vertical Load (kg): 2500</p> <p>Adapted for Tractor</p> <p>Case IH: JXC Maxxima: 1060, 1070, 1075, 1085, 1095; Quantum C: 65, 75, 85, 95; New Holland: T4000 Deluxe: 4020, 4030, 4040, 4050; T4000 Standard: 4020, 4030, 4040, 4050; TN-A: 60, 70, 75, 85, 95; TN-D: 55, 65, 70, 75; TN-DA: 60, 70, 75, 85, 95; TN-S: 55, 65, 70, 75; TN-SA: 60, 70, 75; Steyr: Kompakt: 360, 370, 375, 4065, 4075, 4085, 4095, 4105, 485, 495;</p>