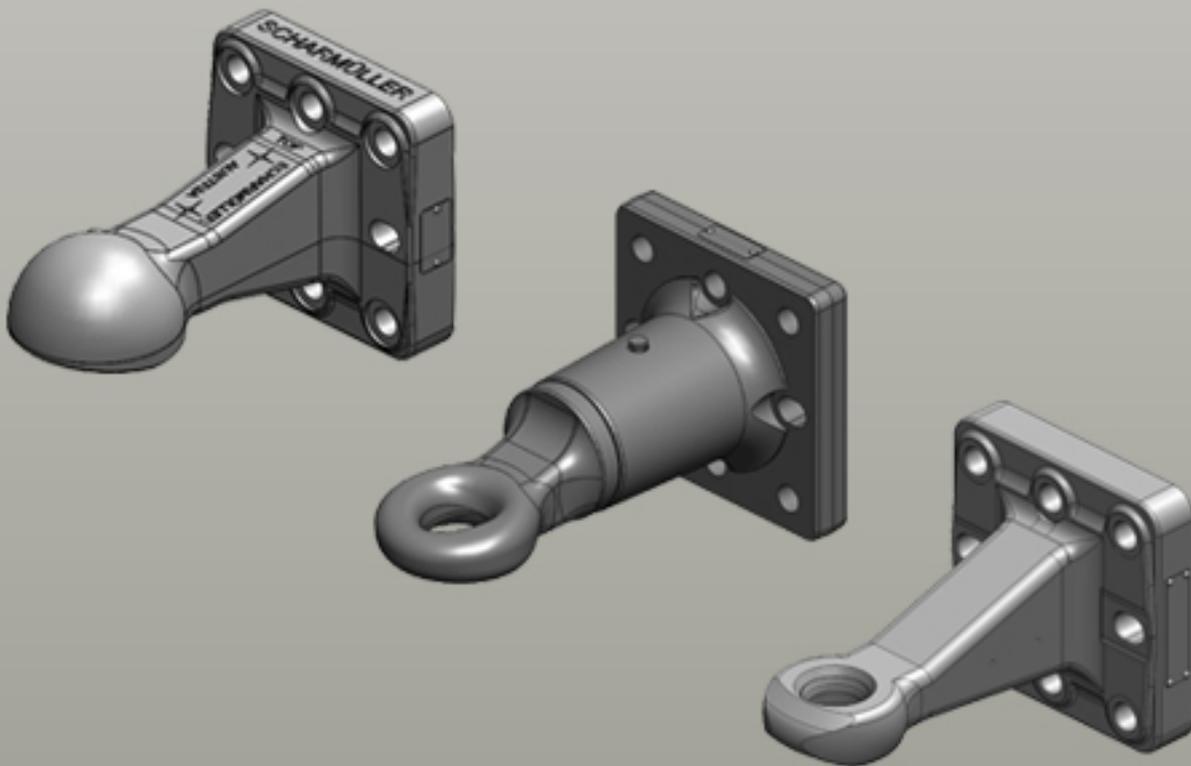
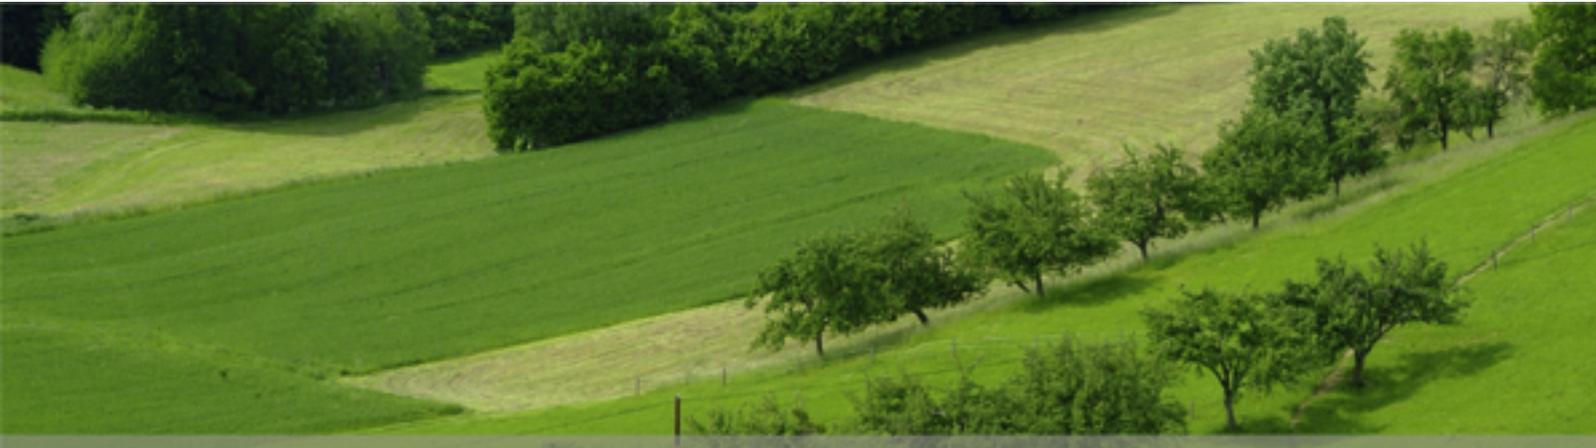





Towing Eyes | Pluggable


Ball Joint Towing Eye Cat. 2 003mm | Ball joint Towing Eye Cat. 3 0062mm | Ball joint Towing Eye Cat. 4 0051mm | Ball joint Towing Eye Cat. 5 0071mm | Ring Towing Eye 0050mm (Pickup Hitchring) | Standard Towing Eye 0060mm (42mm thick)





Towing Eyes | Pluggable

	<p>Art.Nr. 00.651.150.0-A01 Towing Eyes Pluggable Ball Joint Towing Eye Cat. 2 DØ33mm </p> <p>Alternative color </p> <p>00.651.150.0-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 185 Lenght (mm): 454 Shaft Length (mm): 210 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2200 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p>
	<p>Art.Nr. 00.651.160.0-A01 Towing Eyes Pluggable Ball Joint Towing Eye Cat. 3 DØ42mm </p> <p>Alternative color </p> <p>00.651.160.0-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 185 Lenght (mm): 454 Shaft Length (mm): 210 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2700 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p>
	<p>Art.Nr. 00.651.213.0-A02 Towing Eyes Pluggable Standard Towing Eye DØ40mm (42mm thick) </p> <p>Alternative color </p> <p>00.651.213.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 214 Lenght (mm): 444 Max. Permissible D-Value (kN): 83,1 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 130 Drilled Hole Ø (mm): 28 Shaft Height x Width: 100x65 • Full-Shaft Pluggable Approval Status: ABG General Type Approval</p>
	<p>Art.Nr. 00.651.22.0-A01 Towing Eyes Pluggable Standard Towing Eye DØ40mm (42mm thick) </p> <p>with Type Plate for Street Homologation after 94/20/EC</p> <p>Alternative color </p> <p>00.651.22.0-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 215 Lenght (mm): 424 Max. Permissible D-Value (kN): 67,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: 94/20/EC</p>
	<p>Art.Nr. 00.651.22.4-A01 Towing Eyes Pluggable Standard Towing Eye DØ40mm (42mm thick) </p> <p>with Bushing with Type Plate for Homologation after Land and Forestry VO_208_2015</p> <p>Alternative color </p> <p>00.651.22.4-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 215 Lenght (mm): 424 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p>

Towing Eyes | Pluggable

	<p>Art.Nr. 00.651.413.0-A02 Towing Eyes Pluggable Ring Towing Eye DØ50mm rigid (Pickup Hitchring) </p> <p>Alternative color </p> <p>00.651.413.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 216 Lenght (mm): 454 Max. Permissible D-Value (kN): 83,1 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 130 Drilled Hole Ø (mm): 28 Shaft Height x Width: 100x65 • Full-Shaft Pluggable Approval Status: ABG General Type Approval</p>
	<p>Art.Nr. 00.651.42.0-A01 Towing Eyes Pluggable Ring Towing Eye DØ50mm rigid (Pickup Hitchring) </p> <p>with Type Plate for Street Homologation after 94/20/EG</p> <p>Alternative color </p> <p>00.651.42.0-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 215 Lenght (mm): 433 Max. Permissible D-Value (kN): 67,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: 94/20/EC</p>
	<p>Art.Nr. 00.651.42.1-A01 Towing Eyes Pluggable Ring Towing Eye DØ50mm rigid (Pickup Hitchring) </p> <p>with Type Plate for Homologation after Land and Forestry VO_208_2015</p> <p>Alternative color </p> <p>00.651.42.1-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 215 Lenght (mm): 433 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p>
	<p>Art.Nr. 00.656.17.1-A02 Towing Eyes Pluggable Ball Joint Towing Eye Cat. 4 DØ51mm </p> <p>Alternative color </p> <p>00.656.17.1-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 236 Lenght (mm): 343 Max. Permissible D-Value (kN): 110 Max. Permissible Vertical Load (kg): 4000 Hole Pattern/Hole Distance (mm): 57 Drilled Hole Ø (mm): 26 Shaft Height x Width: 170x100 Approval Status:</p> <p>Geeignete Anhänger</p> <p>Horsch: Pronto: 12 DC; SW: 17000SD;</p>
	<p>Art.Nr. 00.656.18.1-A02 Towing Eyes Pluggable Ball Joint Towing Eye Cat. 5 DØ71mm </p> <p>Alternative color </p> <p>00.656.18.1-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 236 Lenght (mm): 343 Max. Permissible D-Value (kN): 110 Max. Permissible Vertical Load (kg): 4000 Hole Pattern/Hole Distance (mm): 57 Drilled Hole Ø (mm): 26 Shaft Height x Width: 170x100 Approval Status:</p> <p>Geeignete Anhänger</p> <p>Horsch: Pronto: 12 DC; SW: 17000SD;</p>

Towing Eyes | Pluggable

	Art.Nr. 00.656.27.2-A02 Towing Eyes Pluggable Standard Towing Eye DØ40mm (42mm thick)
	Alternative color  00.656.27.2-A02 (Black)
Technical Values*	
Hole Pattern Holes: 3 Working Length (mm): 240 Length (mm): 493 Max. Permissible D-Value (kN): 68,8 Max. Permissible Vertical Load (kg): 3000 Drilled Hole Ø (mm): 31 • for Top Connection - above the P.T.O Shaft Approval Status: VO (EU) 2015/208	
Geeignete Anhänger	
Krone: Titan: 4, 6, GD, GL; XL: 4, 6; XXL: R/GD;	
	Art.Nr. 00.656.46.6-A02 Towing Eyes Pluggable Ring Towing Eye DØ50mm rigid (Pickup Hitchring)
	Alternative color  00.656.46.6-A02 (Black)
Technical Values*	
Hole Pattern Holes: 3 Working Length (mm): 190 Length (mm): 449 Max. Permissible D-Value (kN): 68,8 Max. Permissible Vertical Load (kg): 3000 Drilled Hole Ø (mm): 31 • for Bottom Connection - under the P.T.O Shaft Approval Status: VO (EU) 2015/208	
Geeignete Anhänger	
Krone: Titan: 4, 6, GD, GL; XL: 4, 6; XXL: R/GD;	