

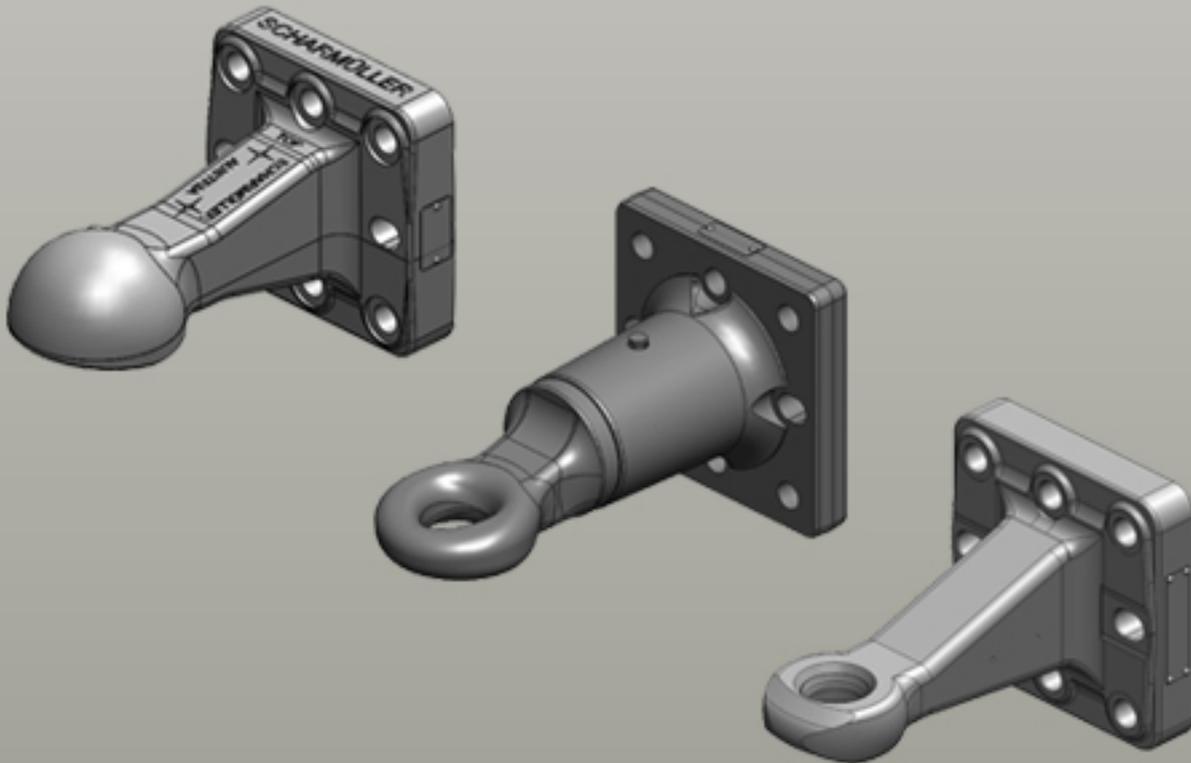











Towing Eyes | Pluggable K80® Towing Eye Ball Coupling System



Towing Eyes | Pluggable

	<p>Art.Nr. 00.647.38.2-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.647.38.2-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 193 Lenght (mm): 455 Max. Permissible D-Value (kN): 87,2 Max. Permissible Vertical Load (kg): 3000 Drilled Hole Ø (mm): 31 • for Bottom Connection - under the P.T.O Shaft Approval Status: VO (EU) 2015/208</p> <p>Geeignete Anhänger</p> <p>Krone: Titan: 4, 6, GD, GL; XL: 4, 6; XXL: R/GD; Strautmann: Super Vitesse: CSF 3502 DO;</p>
	<p>Art.Nr. 00.648.00.0-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.648.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 300 Lenght (mm): 500 Max. Permissible D-Value (kN): 49,9 Max. Permissible Vertical Load (kg): 1200 Drilled Hole Ø (mm): 22 Approval Status: ABG General Type Approval</p> <p>Geeignete Anhänger</p> <p>Welger-Lely: RP: 202, 220, 235, 302, 320;</p>
	<p>Art.Nr. 00.648.18.0-A23 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.648.18.0-A23 (Kioti-Grey)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 222 Lenght (mm): 442 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 125 Drilled Hole Ø (mm): 25 Shaft Height x Width: 100x97 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p> <p>Geeignete Anhänger</p> <p>Rau-Kverneland: Phoenix : B30, B40, C40, C50;</p>
	<p>Art.Nr. 00.650.00.0-A01 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.650.00.0-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 197 Lenght (mm): 288 Max. Permissible D-Value (kN): 68,7 Max. Permissible Vertical Load (kg): 1500 Hole Pattern/Hole Distance (mm): 57 Drilled Hole Ø (mm): 26 Shaft Height x Width: 168x100 Approval Status:</p> <p>Geeignete Anhänger</p> <p>Horsch: Pronto: 12 DC; SW: 17000SD;</p>
	<p>Art.Nr. 00.651.912.2-A01 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>with Type Plate for Homologation after Land and Forestry VO_208_2015</p> <p>Alternative color </p> <p>00.651.912.2-A01 (Black-Primer)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 215 Lenght (mm): 437 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2000 Hole Pattern/Hole Distance (mm): 65 Drilled Hole Ø (mm): 25 Shaft Height x Width: 80x60 • H-Shaft Pluggable Approval Status: VO (EU) 2015/208</p>

Towing Eyes | Pluggable

	<p>Art.Nr. 00.651.913.0-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.651.913.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 215 Lenght (mm): 457 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 3000 Hole Pattern/Hole Distance (mm): 130 Drilled Hole Ø (mm): 28 Shaft Height x Width: 100x65 • Full-Shaft Pluggable Approval Status: ABG General Type Approval</p>
	<p>Art.Nr. 00.656.96.0-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.656.96.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 3 Working Length (mm): 280 Lenght (mm): 542 Max. Permissible D-Value (kN): 89,3 Max. Permissible Vertical Load (kg): 2000 Drilled Hole Ø (mm): 31 • for Bottom Connection - under the P.T.O Shaft Approval Status: VO (EU) 2015/208</p> <p>Geeignete Anhänger</p> <p>Krone: Titan: 4, 6, GD, GL; XL: 4, 6; XXL: R/GD;</p>
	<p>Art.Nr. 00.659.00.0-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.659.00.0-A02 (Black)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 240 Lenght (mm): 462 Max. Permissible D-Value (kN): 60,1 Max. Permissible Vertical Load (kg): 1500 Hole Pattern/Hole Distance (mm): 160 Drilled Hole Ø (mm): 24,5</p> <p>Geeignete Anhänger</p> <p>Mengele: Rotant: 745;</p>
	<p>Art.Nr. 00.659.01.1-A20 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.659.01.1-A20 (Pöttinger-Red)</p> <p>Technical Values*</p> <p>Hole Pattern Holes: 2 Working Length (mm): 240 Lenght (mm): 462 Max. Permissible D-Value (kN): 60,1 Max. Permissible Vertical Load (kg): 1500 Hole Pattern/Hole Distance (mm): 160 Drilled Hole Ø (mm): 20,5 Approval Status: VO (EU) 2015/208</p> <p>Geeignete Anhänger</p> <p>Pöttinger: Boss: II, III; Ernteprofi II: 107; Ernteprofi III: 109; EuroBoss: 330 Tiefgänger; Europrofi: I;</p>
	<p>Art.Nr. 00.663.80.0-A02 Towing Eyes Pluggable K80® Towing Eye Ball Coupling System </p> <p>Alternative color </p> <p>00.663.80.0-A02 (Black)</p> <p>Technical Values*</p> <p>Working Length (mm): 166 Lenght (mm): 270 Shaft Length (mm): 87 Max. Permissible D-Value (kN): 47,9 Max. Permissible Vertical Load (kg): 300 Drilled Hole Ø (mm): 25</p> <p>Geeignete Anhänger</p> <p>Horsch: UW: 160;</p>